

# E PE A 360X360X91 - Empty enclosure



0899359

<https://www.phoenixcontact.com/pc/products/0899359>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Empty enclosure, material: Polyester fiberglass reinforced, squirrel grey RAL 7000, 360 mm x 360 mm x 91 mm, type of locking: Screw-on cover

## Commercial data

|                                      |                                |
|--------------------------------------|--------------------------------|
| Item number                          | 0899359                        |
| Packing unit                         | 1 pc                           |
| Minimum order quantity               | 1 pc                           |
| Note                                 | Made to order (non-returnable) |
| Product key                          | BH9141                         |
| Catalog page                         | Page 644 (C-3-2019)            |
| GTIN                                 | 4055626276281                  |
| Weight per piece (including packing) | 99.99 g                        |
| Weight per piece (excluding packing) | 99.99 g                        |
| Customs tariff number                | 85389099                       |
| Country of origin                    | DE                             |

# E PE A 360X360X91 - Empty enclosure



0899359

<https://www.phoenixcontact.com/pc/products/0899359>

## Technical data

### Notes

|         |                                                |
|---------|------------------------------------------------|
| General | Prepared for direct installation of a DIN rail |
|---------|------------------------------------------------|


### Product properties

|              |                            |
|--------------|----------------------------|
| Type         | Empty enclosure with cover |
| Product type | Terminal box               |

### Insulation characteristics

|                  |    |
|------------------|----|
| Protection class | II |
|------------------|----|

### Dimensions

|                                          |                                                                                     |
|------------------------------------------|-------------------------------------------------------------------------------------|
| Dimensional drawing                      |  |
| Width                                    | 360 mm                                                                              |
| Height                                   | 360 mm                                                                              |
| Depth                                    | 91 mm                                                                               |
| Clearance width, maximum DIN rail length | 343 mm                                                                              |
| max. assembly length                     | 320 mm                                                                              |

### Material specifications

|                                        |                                 |
|----------------------------------------|---------------------------------|
| Color                                  | squirrel grey RAL 7000          |
| Material                               | Polyester fiberglass reinforced |
| Flammability rating according to UL 94 | V0                              |
| Seal material                          | Chloroprene                     |
| Components                             | halogen-free                    |

### Mechanical properties

#### General

|                       |                                 |
|-----------------------|---------------------------------|
| Type of locking (GRP) | Screw-on cover Plus/minus screw |
|-----------------------|---------------------------------|

### Environmental and real-life conditions

#### Ambient conditions

|                                 |                   |
|---------------------------------|-------------------|
| Ambient temperature (operation) | -40 °C ... 100 °C |
|---------------------------------|-------------------|

### Mounting

|                       |                                              |
|-----------------------|----------------------------------------------|
| Assembly instructions | Integrated blind hole                        |
|                       | External fixing clips available as an option |

# E PE A 360X360X91 - Empty enclosure



0899359

<https://www.phoenixcontact.com/pc/products/0899359>

|                          |       |
|--------------------------|-------|
| Direct DIN rail mounting | yes   |
| Useable DIN rail type    | NS 35 |

# E PE A 360X360X91 - Empty enclosure


0899359

<https://www.phoenixcontact.com/pc/products/0899359>




## Drawings

Schematic diagram

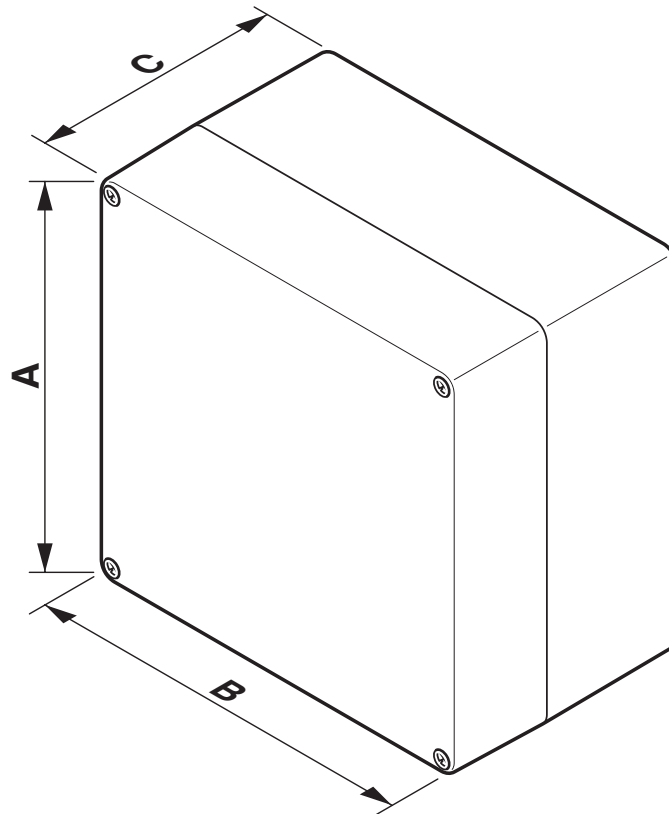

Dimensional drawing

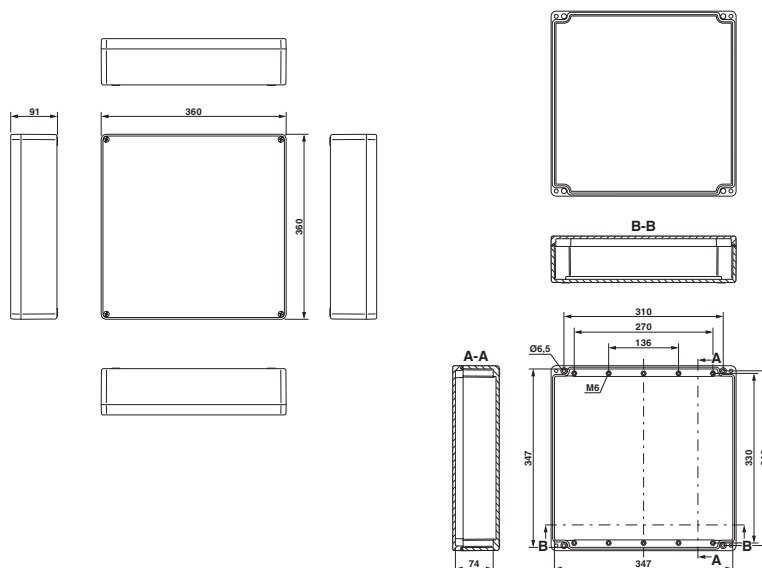

# E PE A 360X360X91 - Empty enclosure



0899359

<https://www.phoenixcontact.com/pc/products/0899359>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-11.0 | 27180101 |
| ECLASS-12.0 | 27180101 |
| ECLASS-13.0 | 27180101 |

### ETIM

|          |          |
|----------|----------|
| ETIM 8.0 | EC000261 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 31261500 |
|-------------|----------|

# E PE A 360X360X91 - Empty enclosure



0899359

<https://www.phoenixcontact.com/pc/products/0899359>

## Environmental product compliance

|            |                                                         |
|------------|---------------------------------------------------------|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
|            | No hazardous substances above threshold values          |

# E PE A 360X360X91 - Empty enclosure



0899359

<https://www.phoenixcontact.com/pc/products/0899359>

## Accessories

### TSD-M 6NM - Torque screwdriver

1212226

<https://www.phoenixcontact.com/pc/products/1212226>



Torque screw driver, accuracy as per EN ISO 6789 standard, adjustable from 3 - 6 Nm

---

### SF-BIT-PHSL 2-70 - Screw insert

1212601

<https://www.phoenixcontact.com/pc/products/1212601>



Screw bit, positive/negative PH/bladed, E6.3-1/4" drive, size: PH 2 x 70 mm, hardened, suitable for holder according to DIN 3126-F6.3/ISO 1174

# E PE A 360X360X91 - Empty enclosure

0899359

<https://www.phoenixcontact.com/pc/products/0899359>



## AE MP SH EP 360X360 - Mounting panel

0899443

<https://www.phoenixcontact.com/pc/products/0899443>



Mounting panel, length: 2 mm, width: 342 mm, height: 342 mm, color: silver

---

## AE EMB A -EP 2 SET - Fixing bracket

0899520

<https://www.phoenixcontact.com/pc/products/0899520>



Fixing bracket, For polyester enclosure, color: silver

# E PE A 360X360X91 - Empty enclosure

0899359

<https://www.phoenixcontact.com/pc/products/0899359>



## NS 35/ 7,5 UNP AE EP 160X360 - DIN rail, unperforated

3002634

<https://www.phoenixcontact.com/pc/products/3002634>



DIN rail, unperforated, material: Steel, galvanized, passivated with a thick layer, color: silver, Suitable for PxC polyester terminal boxes

---

Phoenix Contact 2023 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG

Flachsmarktstraße 8

D-32825 Blomberg

+49 (0) 5235-3 00

[info@phoenixcontact.com](mailto:info@phoenixcontact.com)