

# UCT1-TM 6 BU CUS - Marker for terminal blocks




0829710

<https://www.phoenixcontact.com/pc/products/0829710>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.

Marker for terminal blocks, can be ordered: by sheet, blue, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 6.2 mm, lettering field size: 5.55 x 10 mm, Number of individual labels: 60



## Your advantages

- The UCT1-TM ... UniCard labeling range includes markers for Weidmüller, Conta-Clip, and Klemsan terminal blocks
- Marking service: Phoenix Contact can custom-mark all UniCard markers according to your specifications

## Commercial data

Item number	0829710
Packing unit	1 pc
Minimum order quantity	1 pc
Note	Made to order (non-returnable)
Product key	BG8118
Catalog page	Page 128 (C-5-2013)
GTIN	4046356598637
Weight per piece (including packing)	12.9 g
Weight per piece (excluding packing)	12.9 g
Customs tariff number	49119900
Country of origin	PL

# UCT1-TM 6 BU CUS - Marker for terminal blocks



0829710

<https://www.phoenixcontact.com/pc/products/0829710>

## Technical data

### Product properties

Product type	Labeled terminal marker
Pitch	6.2 mm
Type	high

### Marking

Number of individual labels	60
Number of individual labels per row	10

### Marking technology

Device	5146464 THERMOMARK CARD
	5146480 THERMOMARK CARD-UCT-MAG1
	5147888 BLUEMARK LED
	5147999 BLUEMARK CLED
Ink ribbon	0801371 THERMOMARK-RIBBON 110-TC
	5147421 BLUEMARK FLUID-CARTRIDGE
	5146662 BLUEMARK CLED-FLUID-CARTR.
Printability	Thermal transfer
	Inkjet printing

### Mounting

Mounting type	snap into tall marker groove
---------------	------------------------------

### Material specifications

RoHS compliant	yes
Color	blue
Material	PC
Flammability rating according to UL 94	V0
Relative insulation material temperature index (Elec., UL 746 B)	130 °C
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 3
Components	free from silicone and halogen

### Environmental and real-life conditions

#### Test for substances that would hinder coating with paint or varnish

Result	Test passed
--------	-------------

#### UV resistance

Specification	ISO 4892-2:2013-03 (following)
Result	Test passed
Test duration	96 h

# UCT1-TM 6 BU CUS - Marker for terminal blocks



0829710

<https://www.phoenixcontact.com/pc/products/0829710>

## Ambient conditions

Ambient temperature (operation)	-40 °C ... 120 °C
---------------------------------	-------------------

## Dimensions

Width	5.55 mm
Height	3.48 mm
Length	10 mm
Pitch	6.2 mm

## Standards and regulations


Wipe resistance	DIN EN 61010-1 (VDE 0411-1)
-----------------	-----------------------------

## Notes

General	Can be labeled via thermal transfer
---------	-------------------------------------

## Drawings

Schematic diagram

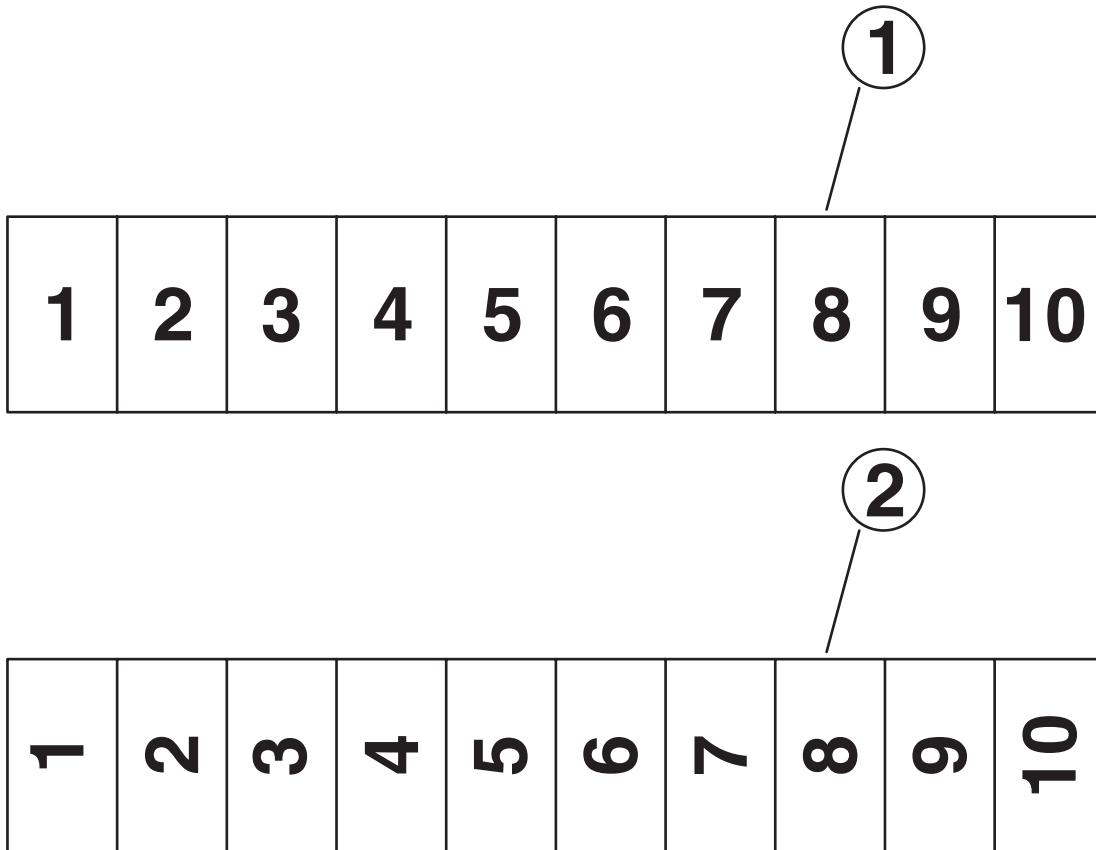

- ① Horizontal
- ② Vertical

# UCT1-TM 6 BU CUS - Marker for terminal blocks



0829710

<https://www.phoenixcontact.com/pc/products/0829710>

## Classifications

### ECLASS

ECLASS-11.0	27281101
ECLASS-12.0	27281101
ECLASS-13.0	27281101

### ETIM

ETIM 8.0	EC000761
----------	----------

### UNSPSC

UNSPSC 21.0	39131500
-------------	----------

Phoenix Contact 2023 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG

Flachmarktstraße 8

D-32825 Blomberg

+49 (0) 5235-3 00

[info@phoenixcontact.com](mailto:info@phoenixcontact.com)