


Product sheet

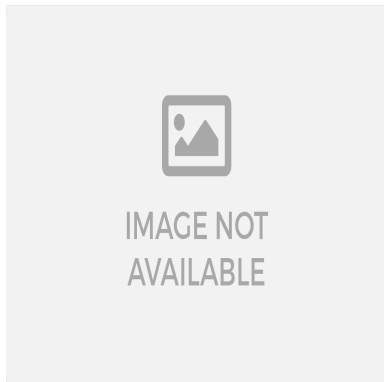

LEGRAND

360° motion sensor - IP41 - 8 m - flush ceiling-mounting - PIR technology - blister

REF. 048944 | EAN. 3414970630322




> [Visit e-catalogue](#)

Product characteristics



- Motion sensors for 1 circuit - motion sensors for passage areas without natural light - Automatic on/off - Manual adjustment of light level threshold and time delay via potentiometer
- Ideal for passage areas PIR IP 20 ceiling - mounting motion sensor, 360° - Blister - Range 8 m - Recommended Fixing height : 2.5 m - 3 - wire with neutral - Light level threshold : 10 to 1275 lux - Adjustable time delay : 10 s to 10 min - Standby consumption : 0,75 W - Optimum distance between 2 sensors : 6 m - Fixes directly to a false ceiling with mounting claws (included) or installed in a Batibox box, depth 50 mm

Documentation

TECHNICAL DOCUMENTATION

-  S000087115FR-4.pdf | PDF (1.69Mo)
-  S000087115EN-2.pdf | PDF (0.97Mo)
-  LE07906AC.pdf | PDF (1.63Mo)

Agreements & Certificates

-  LGRP-00154-V01.01-EN.pdf | PDF (0.57Mo)
-  OC / CB-685326

CAD & Design specs / BIM

Legrand_Gestion_eclairage_Detect_mvt_autonome_360D_Faux_Plafo
nd_Blister.rfa | RFA (0.51Mo)

Legrand_Lighting_Management_Standalone_Motion_Sensor_360D_F
alse_Ceiling_Blister.rfa | RFA (0.52Mo)