

# Lembar data produk

Spesifikasi



single phase power supply,  
100...240V input, 24V DC output,  
250W, 10,5A

ABL2REM24100K

## Main

Range of product	Easy Modicon ABL2
Product or component type	Power supply
Power supply type	Regulated switch mode
Rated power in W	252 W
Main Input Voltage	100...120 V AC single phase 200...240 V
Output voltage	24 V DC
Power supply output current	10.5 A
Operating position	Any position
Vibration resistance	4 gn (f= 10...500 Hz) conforming to IEC 61131-2
Name of test	Electromagnetic hypersensitivity (EHS) conforming to IEC 61000-6-2 level A

## Complementary

Input voltage limits	90...132 V 180...264 V
Network frequency	47...63 Hz
Inrush current	60 A at 100...120 V AC 60 A at 200...240 V AC
Cos phi	0.5
Efficiency	87 %
Power dissipation in W	37.6 W
Current consumption	2.5 A at 240 V
Input protection type	Integrated fuse (not interchangeable)
Output voltage limits	20.4...27.6 V
Line and load regulation	+/- 1 %
Holding time	>= 12 ms at 115 V
Output protection type	Against overload, protection technology: 1.1...1.5 x In Against short-circuits, protection technology: 1.1...1.5 x In Against overvoltage, protection technology: 28.8...33.6 V Thermal
Connections - terminals	For ground connection: screw type terminals, connection capacity: 1 x 4 mm <sup>2</sup> AWG 12
Marking	CE
Electromagnetic compatibility	Immunity to electromagnetic interference conforming to EN 55022 class B

<b>Mounting support</b>	DIN rail with accessory DIN rail with accessory
<b>Operating altitude</b>	5000 m
<b>Output coupling</b>	Series
<b>Overvoltage category</b>	II
<b>Meantime between failure [MTBF]</b>	600000 h at 25 °C
<b>Status LED</b>	1 LED (green) output voltage
<b>Width</b>	215 mm
<b>Height</b>	115 mm
<b>Depth</b>	30 mm
<b>Net weight</b>	0.75 kg

## Environment

<b>Product certifications</b>	EAC IC RoHS KC RCM
<b>IP degree of protection</b>	IP20 conforming to IEC 62368-1
<b>Ambient air temperature for operation</b>	-30...70 °C (with power derating of 2.5 % per °C)
<b>Ambient air temperature for storage</b>	-40...85 °C
<b>Relative humidity</b>	10...95 %
<b>Overvoltage category</b>	Class I conforming to IEC 62368-1
<b>pollution degree</b>	2
<b>Dielectric strength</b>	2000 V between input and ground

## Packing Units

<b>Unit Type of Package 1</b>	PCE
<b>Number of Units in Package 1</b>	1
<b>Package 1 Height</b>	3.6 cm
<b>Package 1 Width</b>	12.3 cm
<b>Package 1 Length</b>	22.2 cm
<b>Package 1 Weight</b>	850.0 g
<b>Unit Type of Package 2</b>	S03
<b>Number of Units in Package 2</b>	21
<b>Package 2 Height</b>	30.0 cm
<b>Package 2 Width</b>	30.0 cm
<b>Package 2 Length</b>	40.0 cm
<b>Package 2 Weight</b>	19.0 kg
<b>Unit Type of Package 3</b>	P06
<b>Number of Units in Package 3</b>	252
<b>Package 3 Height</b>	90.0 cm
<b>Package 3 Width</b>	60.0 cm

---

**Package 3 Length** 80.0 cm

---

**Package 3 Weight** 221.5 kg

## Environmental Data

Schneider Electric bertujuan untuk mencapai status Net Zero pada tahun 2050 melalui kemitraan rantai pasokan, bahan baku yang lebih rendah, dan beredar melalui kampanye "Use Better, Use Longer, Use Again" untuk memperpanjang masa pakai dan daur ulang produk.

[Environmental Data dijelaskan >](#)

[Bagaimana kami menilai keberlanjutan produk >](#)

### Use Better

 <b>Bahan dan Pengemasan</b>	
Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes
<a href="#">EU RoHS Directive</a>	Pro-active compliance (Product out of EU RoHS legal scope)
REACH Regulation	<a href="#">REACH Declaration</a>

### Use Again



 <b>Repak dan remanufaktur</b>	
Take-back	No

# Lembar data produk ABL2REM24100K

## Dimensions Drawings

### Dimensions Drawings

### Mechanical Dimensions

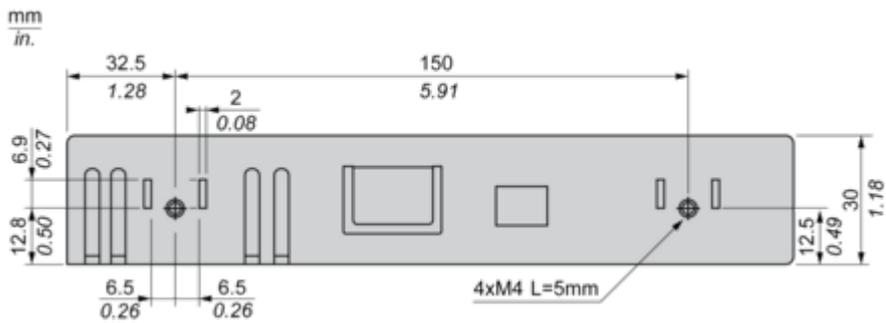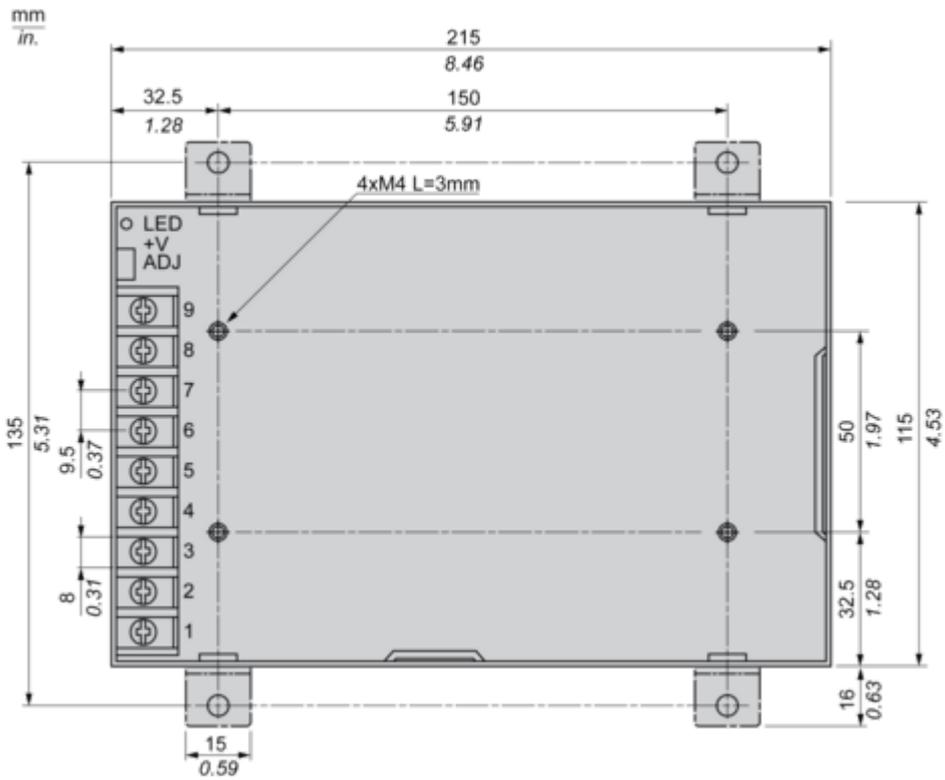


# Lembar data produk ABL2REM24100K

## Mounting and Clearance

### Mounting and Clearance

---


#### Vertical Mounting

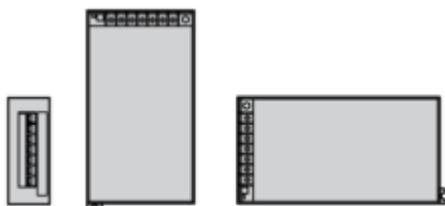

#### Horizontal Mounting



#### Clearance

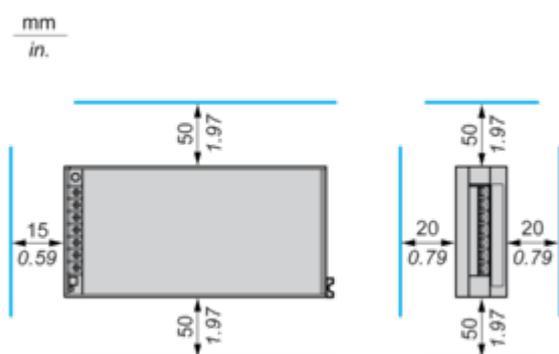


Performance Curves

Performance Curves


---

Static Characteristics

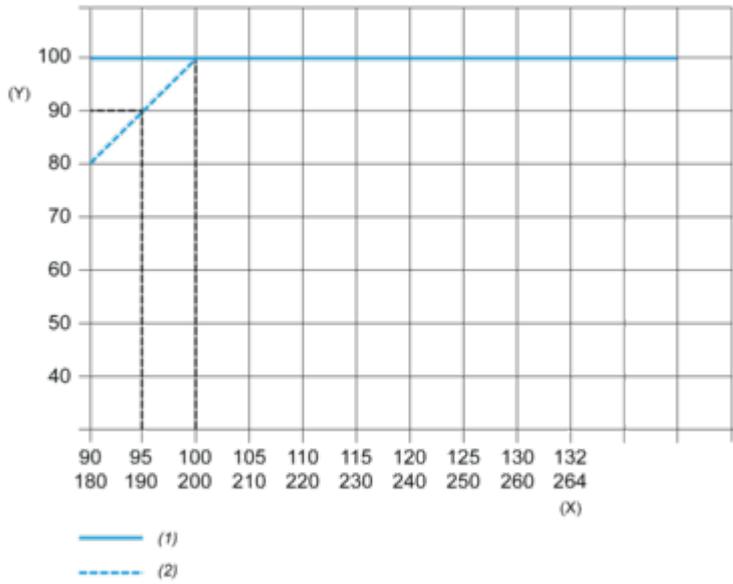

- (1) 180 - 264 VAC
- (2) 90 - 132 VAC
- (y) Load %
- (x) Input voltage (VAC) 50/60 Hz

Derating Curve

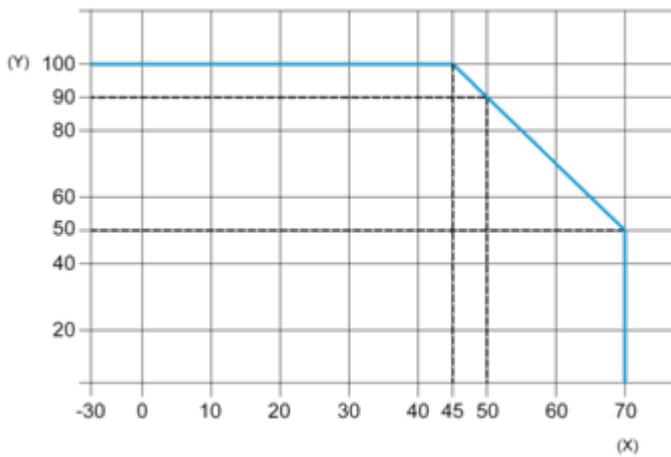

- (y) Load %
- (x) Ambient temperature (°C)