



## 氣動式油壓千斤頂 AIR HYDRAULIC JACKS

- Flexible spring loaded, automatically down after pressure released.
- 2 pcs extended mat attached for each item, LENGTH: 46mm/72mm.

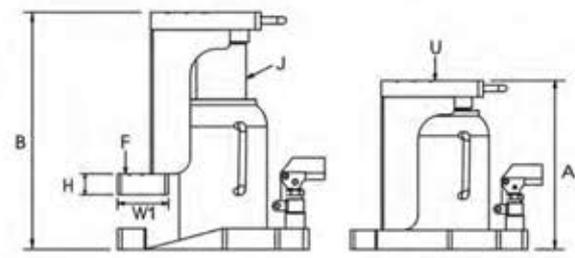

編號 Item	CAPACITY	A	B	D	F	H	J	L	HOSE LENGTH	HANDLE LENGTH	AUXILIARY HEIGHT
<b>CJ201</b>	20TON	200	290	90	55	114	190	125	5'	420	46/72
<b>CJ202</b>	20TON	245	390	145	55	114	190	125	5'	420	46/72
<b>CJ301</b>	30TON	200	290	90	75	140	220	162	5'	420	46/72
<b>CJ302</b>	30TON	245	390	145	75	140	220	162	5'	420	46/72



## L型油壓千斤頂 TOE JACKS

- Heat treated & chrome plated hydraulic rod provide longer seal life and optimum performance.
- Internal safety valve prevents toe jack being used behind its rated capacity.
- Swivel sockets for easy operation.
- Removable handle saves the handle force during operation.

編號 Item	TOP CAP. U(Tons)	TOP-LIFT CAP. F(Tons)	STROKE (mm)	MIN. HEIGHT A(mm)	MAX. HEIGHT B(mm)	PISTON ROD DIA. J(mm)	BASE DIMENSIONS L×W(mm)	HEIGHT H(mm)	TOP-LIFT L1×W1(mm)	WEIGHT (Kgs)
<b>TOE025</b>	2.5	1.2	100	194	294	19	140×190	19	65×50	6.5
<b>TOE040</b>	4	2	110	204	314	25	150×200	19	65×50	8
<b>TOE060</b>	6	3	110	212	322	36	160×217	19	65×50	10
<b>TOE100</b>	10	5	130	258	388	40	189×242	22	75×55	11.9
<b>TOE160</b>	16	8	131	275	406	52	211×256	25	90×55	23
<b>TOE200</b>	20	10	140	303	443	56	228×274	25	100×60	31
<b>TOE300</b>	30	15	147	322	469	70	259×305	32	110×60	47.3
<b>TOE500</b>	50	25	148	333	481	90	299×347	38	150×60	77.5