




Dial Gauge, Lug Back, ISO Type

Item number: 2046A

Images

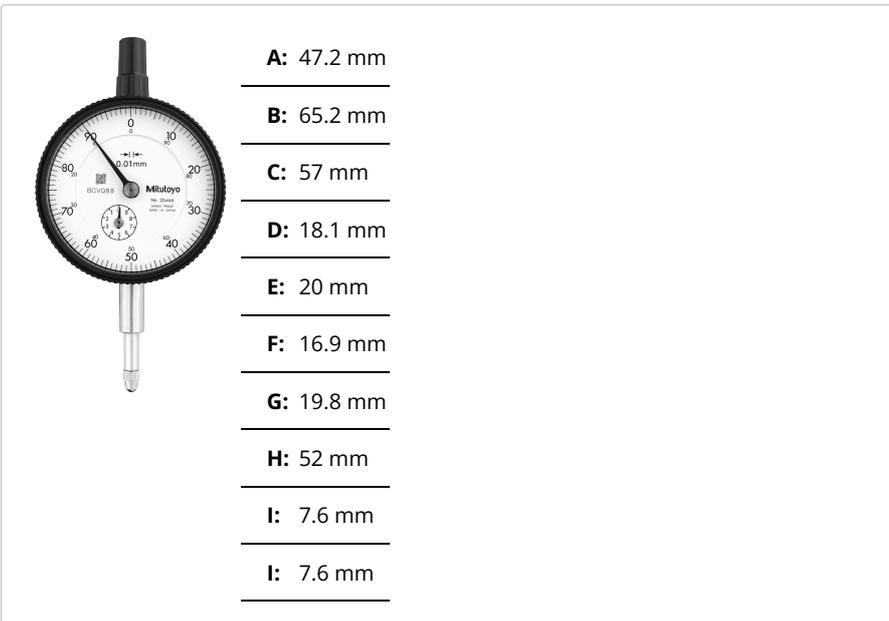

Description

Standard Type, 10 mm Range, 0,01 mm Graduation

This is a standard dial indicator. It offers you the following benefits:

- Bezel clamp and lifting lever (optional) can be attached to either right or left side. They can be easily installed and removed without tools.
- No through screw holes on the frame as well as the use of an O-ring prevents water or oil penetration.

Features

Digital/Analog:	Analog
Inch-Metric:	Metric
Functions:	ISO type
Range:	10 mm
Range per rev.:	1 mm
Dial reading:	±0-100
Graduation:	0.01 mm
Graduation:	0,01 mm
Measuring force:	0,4 - 1,4 N
MPE any 1/10 revolution:	5 µm
MPE any 1/2 revolution:	9 µm
MPE any 1 revolution:	10 µm

MPE measuring range:	13 μm
H MPE (Hysteresis):	3 μm
R MPE (Repeatability):	3 μm
Mass:	144 g
Stem:	8 mm
Contact point:	Carbide tipped, thread: M 2.5 x 0.45 mm
Continuous dial:	Yes

Dimensions

Accessories

Optional accessories:



Limit Hands (green) 2pcs

Dial Indicator Series 2/3/4

Art No. 21AZB195

[Price on application](#)



Bezel Clamp for Dial Gauge

Metric, Series 2/3/4

Art No. 21AZB148

[Price on application](#)



Spindle Lifting Lever

for Digital Indicator, A-Type Dial Indicator

Series 2/3/4

Art No. 21EZA198

[Price on application](#)

Spindle Lifting Cable

for Indicator, L=500 mm
Art No. 21JZA295

[Price on application](#)



Spindle Lifting Cable with Auto Stop

for Indicator, L=300 mm
Art No. 21JZA301

[Price on application](#)



Spare parts

Consumable spares:



Contact Element Ball Point, M2,5x0,45

7,3 mm Length, Carbide, Metric
Art No. 901312

Suggested retail price: **13.00 €***